

INTRODUCE:

HVGT high voltage silicon rectifier diodes is made of high quality glass passivated chip and high reliability epoxy resin sealing structure, and through professional testing equipment inspection qualified after to customers.

FEATURES:

1. High quality silicon wafer chip structure.
2. Ultra fast recovery time.
3. High current and high voltage design.
4. Ultra High Frequency.
5. Epoxy resin molded in vacuum.
6. Have anticorrosion in the surface.
7. UL94 V-0 Rated Material.


APPLICATIONS:

1. High voltage power supply for precision instruments.
2. High voltage power supply for electromechanical equipment.
3. High voltage power supply for medical equipment.
4. Other high voltage rectifier circuits.

MECHANICAL DATA:

1. Case: Epoxy resin molding.
2. Terminal: Axis soft lead.
3. Net weight: 2.60 gram (approx).

REFERENCE SHAPE:

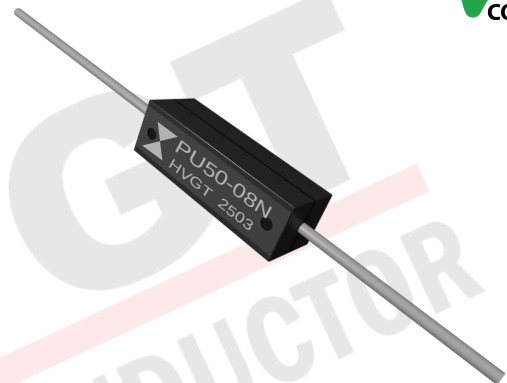


HVGT Name: HVM

Primary Characteristics

IF (AV)	500	mA
VRRM	8.0	kV
IFSM	20	A
IRM	0.5	uA
VFM	12	V
TRR	40	nS
TJ (max.)	150	° C

PACKAGE SIZE:

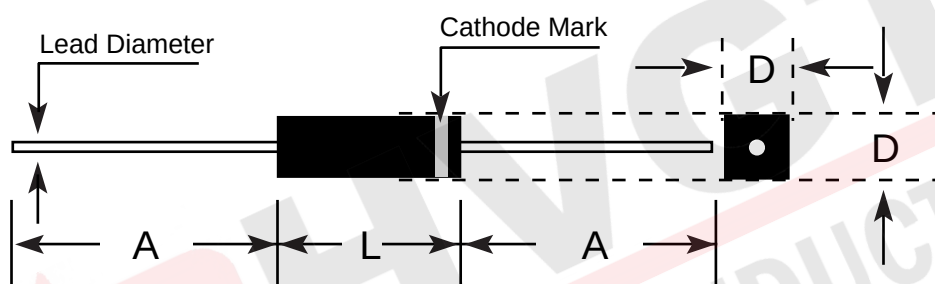


HVM Series

Lead Diameter 1.20±0.03mm

Dim.	Millimeters			Inches		
	Value	Min.	Max.	Value	Min.	Max.
D	7.5	7.3	7.7	0.295	0.287	0.303
L	22.0	21.8	22.2	0.866	0.858	0.874
A	22.0	22.0	--	0.866	0.866	--

MARKING:

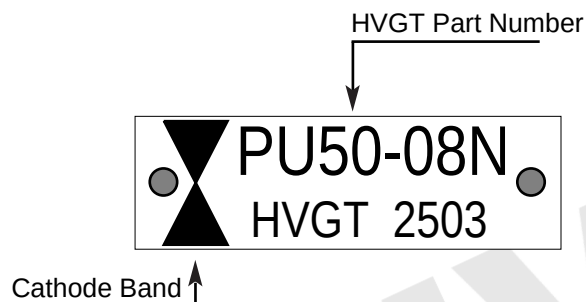

MAXIMUM RATINGS AND CHARACTERISTICS: (Ta=25° C, Ambient temperature unless stated otherwise.)


Items	Symbols	Condition	Data Value	Units
Maximum Repetitive Reverse Voltage	V_{RRM}	--	8.0	kV
Non-Repetitive Peak Reverse Voltage	V_{RSM}	--	9.6	kV
Maximum Average Forward Current	I_{FAVM}	$T_A = 55^\circ C$	500	mA
		$T_{OIL} = 55^\circ C$	900	mA
Non-Repetitive Forward Surge Current	I_{FSM}	60Hz Half-Sine Wave; 8.3ms	20	A
Maximum Junction Temperature	T_J		150	° C
Allowable Operation Case Temperature	T_C		-40~150	° C
Storage Temperature	T_{STG}		-55~175	° C

ELECTRICAL CHARACTERISTICS: (Ta=25° C, Ambient temperature unless stated otherwise.)

Items	Symbols	Condition	Data Value	Units
Maximum Forward Voltage Drop	V_{FM}	At I_{FAVM}	12	V
Maximum Reverse Current	I_{R1}	At V_{RRM} , $T_A = 25^\circ C$	0.5	uA
	I_{R2}	At V_{RRM} , $T_A = 100^\circ C$	20	uA
Maximum Reverse Recovery Time	T_{RR}	$I_F = 0.5I_R$; $I_R = I_{FAVM}$; $I_{RR} = 0.25I_R$	40	nS
Typical Junction Capacitance	C_J	At $V_R = 0VDC$, $f = 1MHz$	7.7	pF

Note: Specifications subject to change without notice. Photo is representation only.
Standard package quantity:500PCS/in Box.

FIGURE 01 Reverse Recovery Measurement Waveform

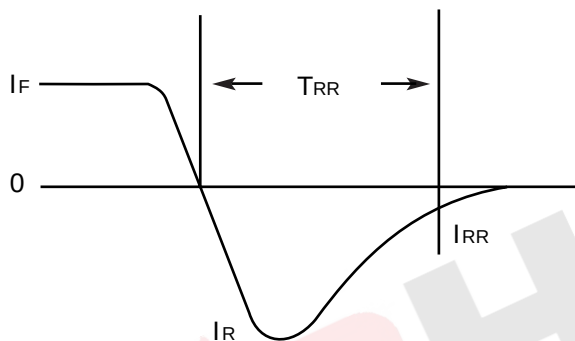

Typical data capture points: $I_F = 0.5I_R$, I_R , $I_{RR} = 0.25I_R$
 I_R is typically the rated average forward current maximum (I_{FAVM}) of the D.U.T

FIGURE 02 Forward Current Derating Curve

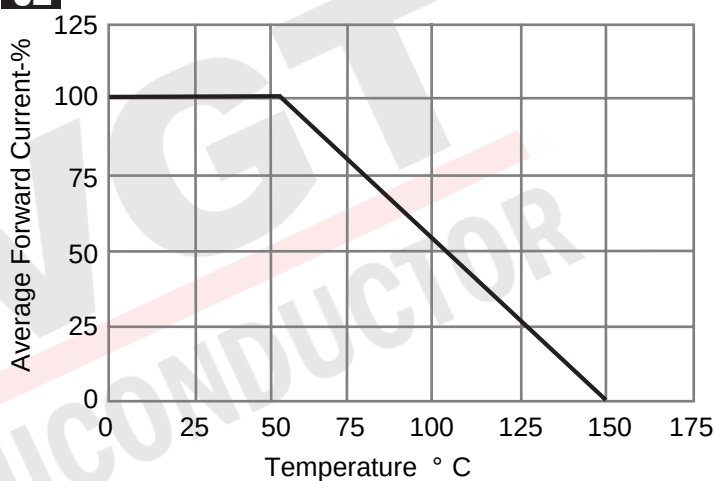


FIGURE 03 Forward Characteristics

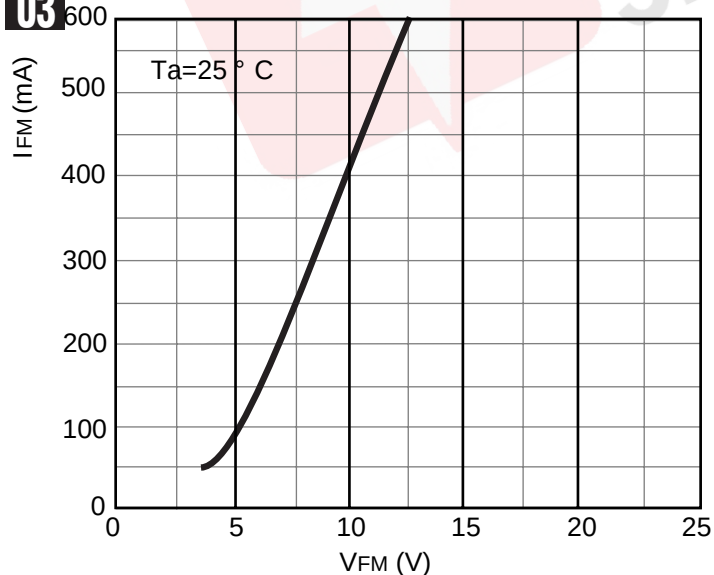


FIGURE 04 Reverse Characteristics


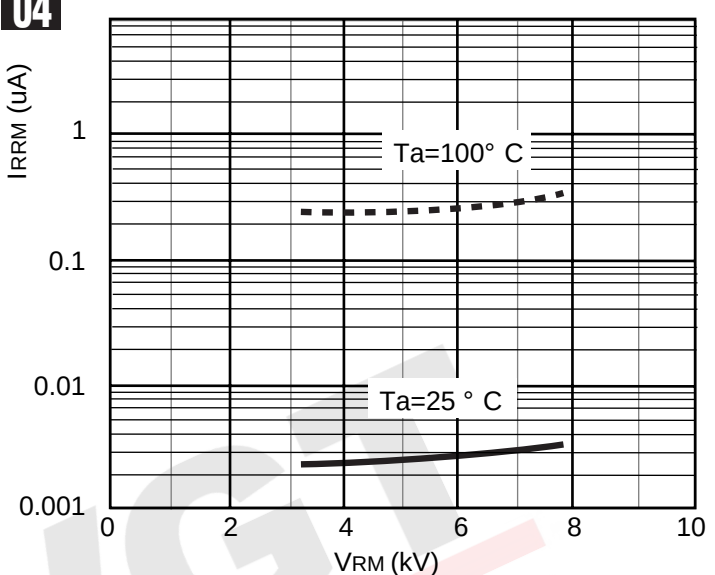


FIGURE 05 Repetitive Surge Current Derating Curve

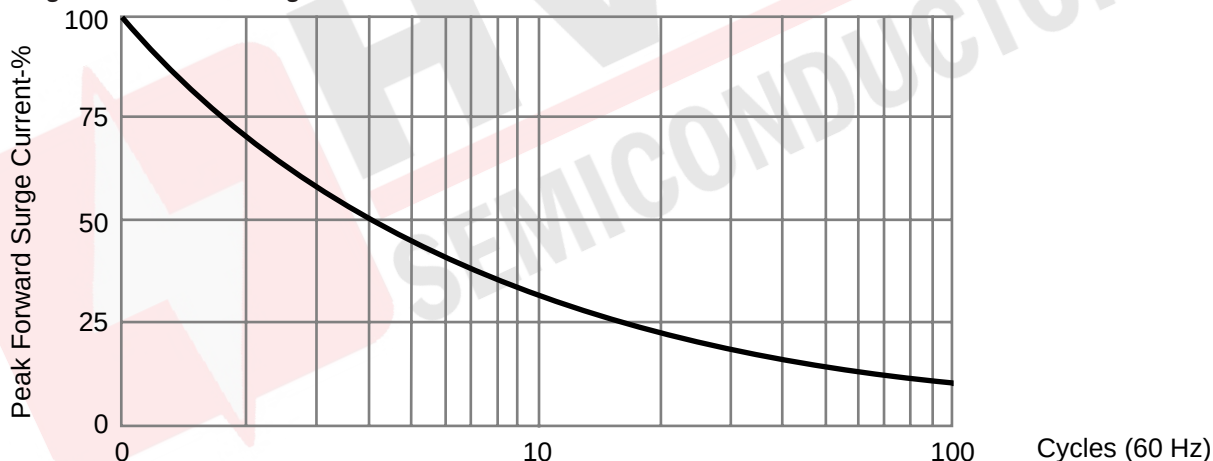

This curve represents the percentage of published maximum surge rating as a function of surge repetition.